



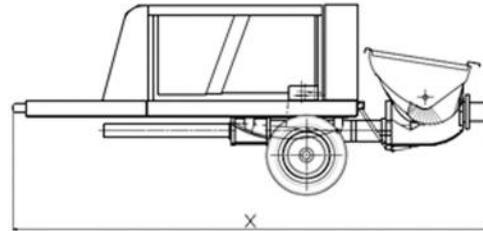

Dolt Right Solutions

We serve you in a better way...

S-1404D



TECHNICAL DATA

S.NO	PARAMETERS	VALUES	
1	Technical identification number	1225	
	Differential cylinder drive	rod side	piston side
2	Maximum concrete pressure(bar)	70	105
3	Maximum theoretical output(m ³)	43	29
4	Maximum number of strokes	28	19
5	Maximum horizontal placing distance(m)*	350	450
6	Maximum vertical placing distance(m)*	90	130
7	Area ratio (hydraulic/concrete)	0.25	0.37
8	Delivery cylinder diameter x stroke	180X1000	
9	Delivery cylinder volume(litre)	25.4 x 2	
10	Drive cylinder	110/63	
11	Engine	KOEL HA 494	
12	Drive power	49 KW	
13	Hydraulic circuit	OPEN	
14	Hydraulic oil volume(litre)	210	
15	Volume of hopper(litre)	450	
16	Type of valve	S (8")	
17	Axle	SPRING	
18	auxiliary system (options)	compressor/water pump	
19	Weight(Kg)	3000	
20	Hopper feeding height-FH (m)	1.1	
21	Dimensions (Length x width x height(XYZ) in mm)	4500x1750x2100	

Applications

1. Contractors
2. RMC Suppliers

Technology

S-Valve Technology

Advantage

Low Loading Height - Best in market.
Best in class pumping.

Proudly designed and Made in India



For Sales Contact :
+91-9563863333