



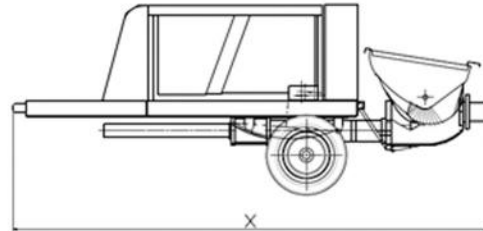

Dolt Right Solutions

S-300D

We serve you in a better way...



TECHNICAL DATA

S.NO	PARAMETERS	VALUES
1	Technical identification number	1225
	Differential cylinder drive	rod side
2	Maximum concrete pressure(bar)	48
3	Maximum theoretical output(m ³)	28
4	Maximum number of strokes	26
5	Maximum horizontal placing distance(m)*	200
6	Maximum vertical placing distance(m)*	60
7	Area ratio (hydraulic/concrete)	0.25
8	Delivery cylinder diameter x stroke	180X700
9	Delivery cylinder volume(litre)	17.8 x 2
10	Drive cylinder	110/63
11	Engine	KOEL HA 494
12	Drive power	45KW
13	Hydraulic circuit	OPEN
14	Hydraulic oil volume(litre)	180
15	Volume of hopper(litre)	350
16	Type of valve	S (8")
17	Axle	SPRING
18	auxiliary system (options)	compressor/water pump
19	Weight(Kg)	2300
20	Hopper feeding height(m)	1.2
21	Dimensions (Length x width x height(XYZ) in mm)	3900x1750x2000

Applications

1. Contractors
2. RMC Suppliers

Technology

S-Valve Technology

Advantage

Low Loading Height - Best in market.
Best in class pumping.

Proudly designed and Made in India



For Sales Contact :
+91-9563863333